

2023

Pattern and Polarization Diversity Multisector Annular Antenna for IoT Applications

Abel Zandamela

Trinity College Dublin, Ireland

Nicola Marchetti

Trinity College Dublin, Ireland

Max Ammann

Technological University Dublin, max.ammann@tudublin.ie

See next page for additional authors

Follow this and additional works at: <https://arrow.tudublin.ie/ahfrcart>



Part of the [Electrical and Electronics Commons](#)

Recommended Citation

Zandamela, Abel; Marchetti, Nicola; Ammann, Max; and Narbudowicz, Adam, "Pattern and Polarization Diversity Multisector Annular Antenna for IoT Applications" (2023). *Articles*. 92.

<https://arrow.tudublin.ie/ahfrcart/92>

This Article is brought to you for free and open access by the Antenna & High Frequency Research Centre at ARROW@TU Dublin. It has been accepted for inclusion in Articles by an authorized administrator of ARROW@TU Dublin. For more information, please contact arrow.admin@tudublin.ie, aisling.coyne@tudublin.ie, vera.kilshaw@tudublin.ie.



This work is licensed under a [Creative Commons Attribution-Share Alike 4.0 International License](#).

Funder: Science Foundation Ireland under Grant 18/SIRG/5612

Authors

Abel Zandamela, Nicola Marchetti, Max Ammann, and Adam Narbudowicz

Pattern and Polarization Diversity Multisector Annular Antenna for IoT Applications

Abel Zandamela¹, Graduate Student Member, IEEE, Nicola Marchetti², Senior Member, IEEE, Max J. Ammann³, Fellow, IEEE, and Adam Narbudowicz⁴, Senior Member, IEEE

Abstract—This work proposes a small pattern and polarization diversity multisector annular antenna with electrical size and profile of $ka = 1.2$ and 0.018λ , respectively. The antenna is planar and comprises annular sectors that are fed using different ports to enable digital beamforming techniques, with efficiency and gain of up to 78% and 4.62 dBi, respectively. The cavity model analysis is used to describe the design concept and the antenna diversity. The proposed method can produce different polarization states (e.g., linearly and circularly polarized patterns) and pattern diversity characteristics covering the elevation plane. Owing to its small electrical size, low-profile and diversity properties, the solution shows good promise to enable advanced radio applications like wireless physical layer security in many emerging and size-constrained Internet of Things (IoT) devices.

Index Terms—Annular sector antennas, beamforming, pattern diversity, polarization diversity, small antennas, small Internet of Things (IoT) devices.

I. INTRODUCTION

THE ability of an antenna to alter its radiated pattern and polarization characteristics is a highly desirable property in many wireless systems [1], [2], [3], [4], [5], [6], [7]. In that regard, the rapid advance of the Internet of Things (IoT) technology creates an increasing need for small pattern and polarization diversity antennas to support cutting-edge applications like ON/OFF-body communications, medical body area networks, localization, physical layer security, and others [8], [9], [10], [11], [12], [13], [14].

Small pattern diversity antennas have been proposed, e.g., [14], [15], [16], [17], [18], [19], [20], [21]. In [16], a unilateral turnstile-shaped patch antenna is proposed for azimuth plane beamsteering; the antenna has size $ka = 1.32$, and profile 0.024λ (where a is the radius of the smallest

sphere that completely encloses the antenna at the center operating frequency $f = c/\lambda$, $k = 2\pi/\lambda$ is the free space wavenumber, and λ is the wavelength). Magnetic and electric near-field resonant parasitic elements are used for pattern diversity in [18] (size: $ka = 0.98$, and profile: 0.0026λ). A shared-aperture pattern diverse quasi-Yagi antenna with size $ka = 3$ and a profile of 0.005λ is proposed in [19]. A modified array structure (size: $ka = 0.98$ and profile: 0.004λ) is used to switch between unidirectional and omnidirectional patterns in [21]. Further studies in miniaturized antennas are presented, e.g., [22], [23], [24], [25], [26], [27], [28]. A quad-polarized Huygens dipole antenna with $ka = 0.944$ and profile 0.044λ is discussed in [22]. The theory of characteristics modes is used for quad-polarization in [25], with size $ka = 2.36$ and a profile of 0.008λ . Li et al. [26] proposed a tri-polarized planar antenna with $ka = 2$ and a profile of 0.04λ . While the above-discussed designs present significant advances in efficiency, bandwidth, and single-diversity performance, some works either still have a relatively large electrical size or profile [14], [16], [24], [25], [26], [27], or the pattern diversity is restricted to a few discrete states that cannot be activated simultaneously, e.g., [15], [16], [17], [18], [20], [21], [22], [23], [24], [25], [26], [27]. This limits the implementation of many emerging and advanced wireless radio applications like localization and physical layer security techniques in small IoT devices.

It should be highlighted that all the above works either allow for pattern or polarization diversity. Therefore, it is difficult to design a dual-diversity antenna with a small electrical size and low-profile; however, such antennas have the potential to enable many advanced wireless applications. In recent years, only a few works have proposed pattern and polarization diverse compact antennas, e.g., [28], [29], [30], [31]. The work in [29] proposed a three-layer Yagi patch antenna with $\pm 45^\circ$ dual-polarization and pattern diversity (size: $ka = 5.2$ and profile 0.08λ). In [30], a radiating patch antenna is combined with diagonal metal walls for multipolarization and multidirectional beams (size: $ka = 2$ and profile: 0.14λ). In [28], a dual-polarized beamsteering active reflection metasurface antenna is proposed (size: $ka = 4.68$, and profile 0.4λ). Lastly, an aperture-stacked patch with cross-shaped parasitic strips is used for dual-polarization and pattern diversity in [31] (size: $ka = 5.3$ and profile: 0.23λ). While the above designs can enable pattern and polarization diversity, their dimensions are still relatively large (i.e., $\geq 2ka$) for size-constrained IoT

Manuscript received 2 March 2023; revised 29 June 2023; accepted 4 July 2023. Date of publication 20 July 2023; date of current version 6 September 2023. This work was supported by the Science Foundation Ireland under Grant 18/SIRG/5612. (Corresponding author: Abel Zandamela.)

Abel Zandamela and Nicola Marchetti are with the CONNECT Centre, Trinity College Dublin, The University of Dublin, Dublin 2, D02 PN40 Ireland (e-mail: zandamea@tcd.ie; nicola.marchetti@tcd.ie).

Max J. Ammann is with the Antenna and High Frequency Research Centre, School of Electrical and Electronic Engineering, Technological University Dublin, Dublin 7, D07 ADY7 Ireland (e-mail: max.ammann@tudublin.ie).

Adam Narbudowicz is with the CONNECT Centre, Trinity College Dublin, The University of Dublin, Dublin 2, D02 PN40 Ireland, and also with the Department of Telecommunications and Teleinformatics, Wrocław University of Science and Technology, 50-370 Wrocław, Poland (e-mail: narbudoa@tcd.ie).

Color versions of one or more figures in this article are available at <https://doi.org/10.1109/TAP.2023.3295845>.

Digital Object Identifier 10.1109/TAP.2023.3295845

applications. In addition, these structures are not planar, which can limit their integration in many emerging IoT systems.

Microstrip patch antennas are a well-known solution for designing low-cost, low-profile, and planar antennas, which are some of the key requirements for IoT applications. For a microstrip patch antenna occupying an area that can be bounded by a region of radius r , one can design a sector microstrip patch by using only a portion of the patch area. The sector area is then given by $A_{sector} = \pi r^2(\alpha/2\pi)$, where α is the sector angle. Such structures can be advantageous over standard shapes like circular, annular rings, or rectangular shapes in terms of size and profile miniaturization, as well as simpler design structures. Sector microstrip antennas have been proposed, e.g., [32], [33], [34], [35], [36], [37], [38]. In [33], a driven circular sector and annular sector directors are used to design a quasi-Yagi array. In [34], a sector annular ring with a coupled sector patch is used for dual-band operation. Circular sector antennas are investigated for bandwidth enhancement and antenna miniaturization in [35], [36], [37], and [38], with null-scanning in [36], tilted circular polarization in [37], and low cross-polarization in [38]. However, pattern and polarization diversity are not realized in the above designs, limiting their use for advanced radio applications in emerging small IoT devices.

In this work, we propose for the first time a small pattern and polarization diversity multisector annular microstrip patch antenna. The design comprises four-ports and operates near 4 GHz, with electrical size $ka = 1.2$, low-profile of 0.018λ , and a 10 and 6 dB impedance bandwidth (IBW) of 11 and 79 MHz, respectively. The antenna is planar and exploits annular sectors, slits, and vias-based mutual coupling enhancement methods to realize a simpler design configuration with different polarization, e.g., linear, circular, and $\pm 45^\circ$ dual-polarization. In addition, good beamsteering characteristics covering the elevation plane are also demonstrated with an antenna gain of up to 4.62 dBi. At first, the design principle of an annular sector antenna is presented. Then a multiport design is derived, and the mutual coupling enhancement techniques are discussed. Next, the diversity characteristics are described. Finally, experimental results are presented to validate the proposed design concept.

II. WORKING PRINCIPLE AND ANTENNA CONFIGURATION

A. Design Principle

For an annular sector microstrip antenna printed on an electrically thin substrate, i.e., $t \ll \lambda$ (where t is the substrate thickness), the cavity model can be used to determine the generated electric fields at a point (ρ, ϕ) [39]

$$\mathbf{E}(\rho, \phi) = j\omega\mu\hat{z} \sum_{m,n} \frac{\psi_{mn}(\rho, \phi)\psi_{mn}(\rho', \phi')}{k^2 - k_{mv}^2} \quad (1)$$

where k is the wavenumber, (ρ', ϕ') is the feed point in polar coordinates, μ is the permeability of the medium, and the eigenfunctions are computed as [40]

$$\psi_{mn} = [J_v(k_{mv}\rho)N'_v(k_{mv}r_i) - J'_v(k_{mv}r_i)N_v(k_{mv}\rho)] \cos v\phi \quad (2)$$

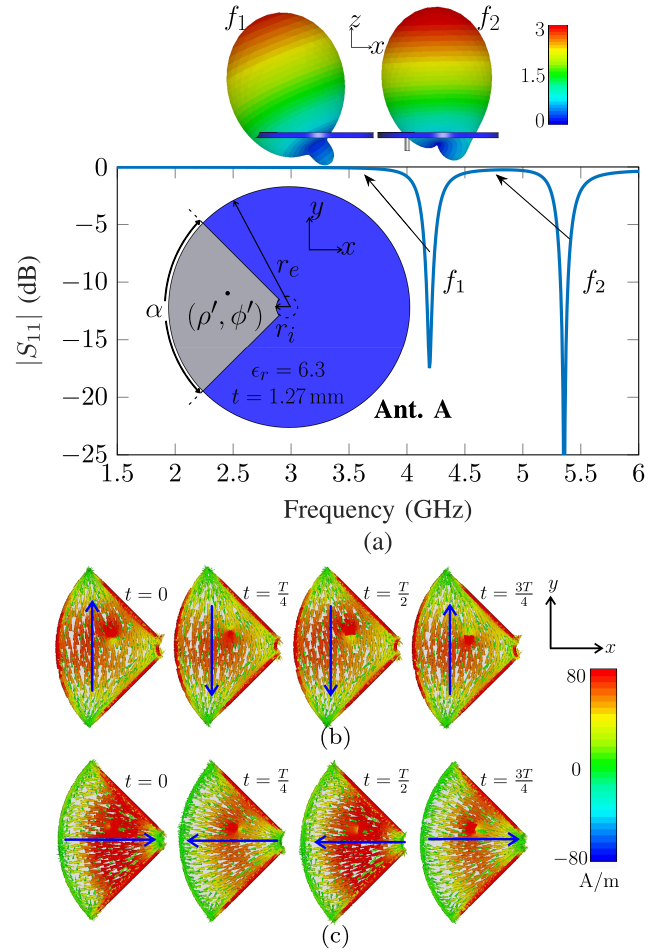


Fig. 1. Annular sector microstrip antenna. (a) S-parameters and 3-D patterns of the first two modes of the proposed annular sector antenna [(Ant. A) shown as inset, with the color gray used for the metalization layer and the color blue represents the slots (no metalization, i.e., the substrate material)]. (b) Surface current distribution of the annular sector at different time points for f_1 (the fundamental mode, i.e., mode 1). (c) Surface currents at f_2 (mode 2).

where J_v and N_v represent the cylindrical functions of the first and second kind (Bessel and Neumann functions) of order v , respectively; $v = n\pi/\alpha$, α is the sector angle, k_{mv} are the resonant wave numbers, which are solutions of

$$J'_v(k_{mv}r_i)N'_v(k_{mv}r_e) = J'_v(k_{mv}r_e)N'_v(k_{mv}r_i) \quad (3)$$

where r_i and r_e are the annular sectors' inner and outer radii, respectively. The corresponding resonance frequency for the specific mode can then be approximated by $f = ck_{mv}/(2\pi r_e \sqrt{\epsilon_r})$, where c is the light velocity in vacuum, and ϵ_r is the substrate relative permittivity.

The inset in Fig. 1(a) shows Ant. A, a simple annular sector antenna with $\alpha = \pi/2$, $n = 1$, $r_i = 1.5$ mm, and $r_e = 14$ mm. The sector is printed on a TMM6 substrate ($\epsilon_r = 6.3$, $\tan\delta = 0.0023$, and thickness $t = 1.27$ mm). The S-parameters are shown in Fig. 1(a), where the fundamental mode resonates at $f_1 = 4.2$ GHz, and the second mode at $f_2 = 5.35$ GHz. The surface current distribution at different time points is shown in Fig. 1(b) (for mode 1) and Fig. 1(c) (for mode 2), with the current direction highlighted for easier observation. It is noted that for mode 1 (at f_1), strong currents

are seen at the center of the sector, and they are basically in the y -direction. At phase angle $t = 0^\circ$, the flowing direction is toward $+y$, while they flow toward $-y$ for the next two quarters of the period and return to $+y$ -direction for phase angle $t = (3T/4)$; this configuration then produces a linearly polarized broadside pattern with the main beam in the xz plane [see Fig. 1(a) (top)]. For mode 2 (at f_2), the currents are along the x -direction. It is seen that the currents are stronger near the center and closer to the edges of the inner radius; at $t = 0^\circ$ strong currents are seen at the center, and the flow is toward the $+x$ -direction; they then flow toward the $-x$ -direction for the next two-quarters of the period reaching another state with strong currents at $t = (T/2)$ while returning to $+x$ for $t = (3T/4)$. This indicates that strong currents are seen at every one-quarter of a period with a change in direction of the currents, which produces a linearly polarized beam pattern but with the main beam pointing at broadside $\theta = 0^\circ$. In both cases: $|S_{11}| > 16$ dB, and the total efficiency is $> 85\%$. This performance is realized with total dimensions: $28 \times 28 \times 1.34$ mm or $0.39\lambda \times 0.39\lambda \times 0.018\lambda$, where λ is the wavelength at $f_1 = 4.2$ GHz.

B. Multiport Design

In the next design step, three additional annular sectors are integrated into the antenna volume. The total electric field of the antenna at $r > 8r_e^2/\lambda$ can then be approximated as the superposition of the $L = 4$ annular sectors using

$$\mathbf{E}_{tot}(r, \theta, \phi) = \sum_{l=1}^L c_l \mathbf{E}_l \quad (4)$$

where $c_l = |A_l|e^{j\Delta\beta_l}$ is the excitation coefficient of the l th annular sector; $|A_l|$, $\Delta\beta_l$ are the amplitude and phase excitation, respectively; \mathbf{E}_l is l th sector electric field obtained from (1).

To allow separation between the annular sectors, four slits of width $w_1 = 0.5$ mm, and length $l_1 = 12.5$ mm are used [see Fig. 2(a)]. The coordinates of the feed point are $P1(x, y) = P1(-6.5, 2.3)$ mm, and the feed of the remaining ports are obtained by rotating $P1$ by 90° with respect to the center of the substrate. The mutual coupling $|S_{mn}|$ between different sectors is obtained from a finite element method 3-D full-wave solver. For the multiport Ant. B [inset of Fig. 2(a)], which uses the basic structure of Ant. A, the $|S_{mn}| < 4$ dB and are shown in Fig. 2(a). Such mutual coupling values are considered insufficient for many applications, as they can significantly reduce the overall system performance, e.g., antenna gain and beamsteering characteristics.

To improve $|S_{mn}|$, reactive loading in the form of shorting pins is introduced, which also allows for improved frequency tuning. From Ant. B, a single pin of radius r is placed at $d_1 = 1$ mm from the edge of the outer diameter [see Fig. 2(b)]; because of the proximity to the edge, this value should be adjusted for larger pin radius. Next, different r values 0.125–0.5 mm are tested and $|S_{mn}|$ stays below 5.2 dB in all cases. The value d_1 is also tested from 1 to 3 mm (with $r = 0.25$ mm), and the $|S_{mn}|$ also stays below 5.2 dB. In the next step, a second pin also of radius $r = 0.25$ mm is

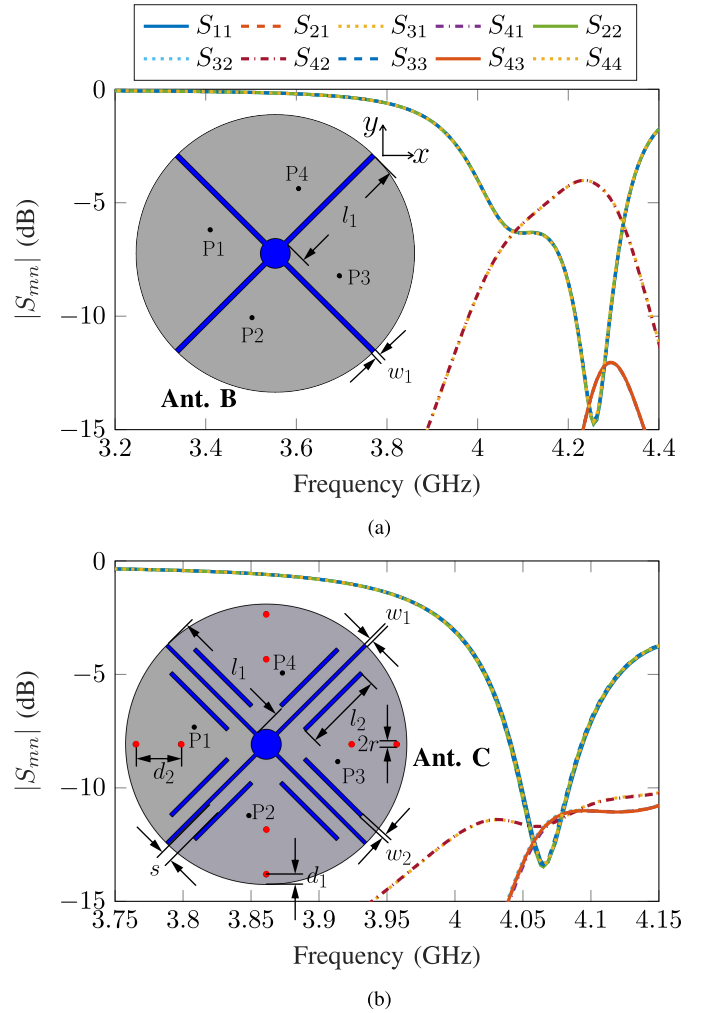


Fig. 2. S-parameters of the proposed antennas. (a) Ant. B (shown as inset), obtained using the basic structure of Ant. A operating at f_1 mode and (b) Ant. C operating at f_1 mode with electrical size $ka = 1.2$.

introduced at distance d_2 [see Fig. 2(b)]; this value is tested from 1 to 7 mm, and $d_2 = 4.5$ mm with $|S_{mn}| < 6.2$ dB is chosen. Further mutual coupling enhancement is realized by tuning the feed position, tuning the gap between each sector (w_1), and adding slits of length (l_2) and width (w_2). The slits are placed at distance s from the sector side; also note that the surface currents' path will increase as they flow around the slit, providing miniaturization. For further size reduction, a second slit with a similar configuration is introduced at the opposite side of the sector. Note that techniques like high-permittivity loading can also be used with the proposed antenna. However, for lower ka values, increased antenna losses are observed, with decreased total efficiency and deterioration of the coupling characteristics.

Fig. 3 shows parametric studies of Ant. C. For brevity, only $|S_{11}|$ and the coupling between the opposite sector $|S_{31}|$ and one adjacent sector $|S_{21}|$ are shown. Fig. 3(a) shows the $|S_{mn}|$ for different l_2 values with $s = 1.3$ mm. It is seen that $|S_{mn}| > 11$ dB is realized for $l_2 = 8$ mm, and the center frequency increases for smaller l_2 values. The parametric results for w_2 are shown in Fig. 3(b); it is observed

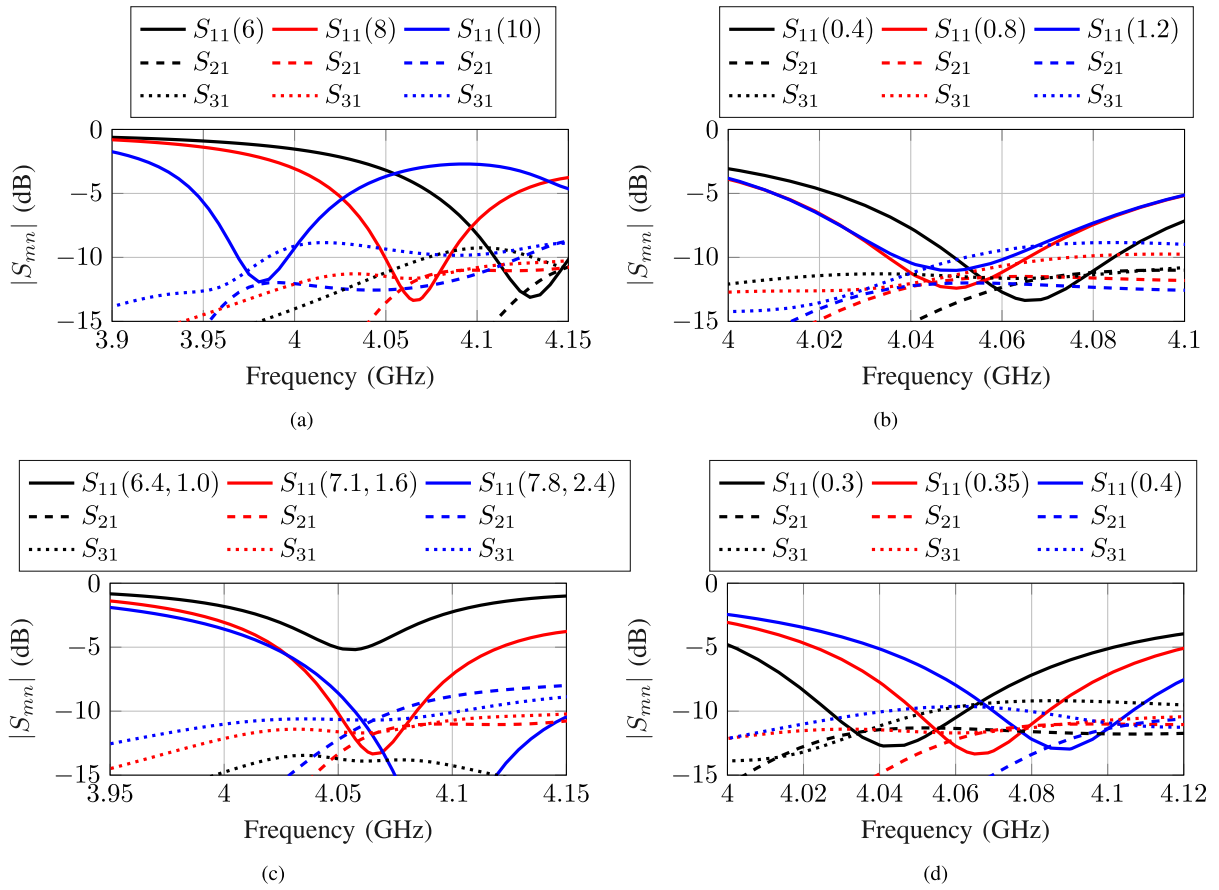


Fig. 3. Full-wave simulated parametric results for (all values in mm) (a) slit length (l_2), (b) slit width (w_2), (c) feed position, and (d) sectors gap (w_1).

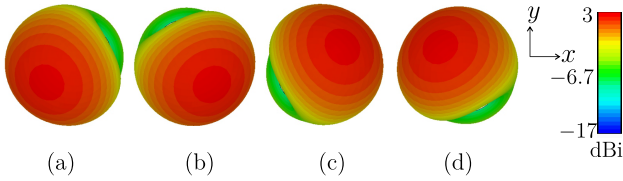


Fig. 4. 3-D realized gain for Ant. C. (a) P1. (b) P2. (c) P3. (d) P4.

that $w_2 = 0.4$ mm achieves better isolation characteristics. Fig. 3(c) shows the results for different feed positions along the slit length, and the optimal feed location is (7.1, 1.6 mm). The gap between each sector is also tested for different values and the results are shown in Fig. 3(d). It can be seen that the center frequency increases for larger w_1 values, and $|S_{mn}| > 11$ dB is realized for $w_1 = 0.35$ mm. The $|S_{mn}|$ with optimized parameters are shown in Fig. 2(b), the frequency is lowered from $f_1 = 4.25$ GHz (Ant. B) to $f_1 = 4.065$ GHz (Ant. C), where the total efficiency is $> 60\%$ and $|S_{mn}| > 11.7$ dB. The 10 and 6 dB IBWs are, respectively, 36.5 and 82 MHz, and the total efficiency is $> 40\%$ across the entire 6 dB IBW region. The antenna dimensions are $0.38\lambda \times 0.38\lambda \times 0.018\lambda$, and $ka = 1.2$.

III. PATTERN AND POLARIZATION DIVERSITY

Fig. 4 shows the radiation pattern for each sector of the proposed antenna, and the peak realized gain is around

2.64 dBi for each case. Using (4), different states are created to obtain pattern and polarization diversity. When P1 and P4 are simultaneously excited with no additional phase-shifts, i.e., P1 ($|A_1|e^{j\Delta\beta_1} = |A_1|$) and P4 ($|A_4|e^{j\Delta\beta_4} = |A_4|$), sectors 1 and 4 generate a radiation pattern with the main beam in the xz plane Quadrant I [see Fig. 5(a)]. When P2 and P3 are excited simultaneously, they produce a pattern with the main beam in the xz plane Quadrant II, or at 70° with respect to the main beam of P1 and P4 (i.e., $\theta_{P2P3} = \theta_{P1P4} + 70^\circ$). To cover the yz plane ($\phi = 90^\circ$), P1 ($|A_1|e^{j\Delta\beta_1} = |A_1|$) and P2 ($|A_2|e^{j\Delta\beta_2} = |A_2|$) are excited simultaneously to create a pattern with the main beam in the yz plane Quadrant I [see Fig. 5(b)]; and a second pattern in Quadrant II, can be generated by simultaneously exciting P3 and P4.

Fig. 6 shows a horizontally polarized omnidirectional pattern obtained by simultaneous excitation of all the antenna ports without additional phase shifts in each excited port. Fig. 7(a) shows a linearly polarized pattern with the main beam pointing at $\theta = 0^\circ$. The pattern is generated by exciting pairs (P1, P3) and (P2, P4) with a 180° phase difference between the ports; this is ($|A_1|e^{j\Delta\beta_1} = |A_1|$, $|A_3|e^{j\Delta\beta_3} = -|A_3|$), and ($|A_2|e^{j\Delta\beta_2} = |A_2|$, $|A_4|e^{j\Delta\beta_4} = -|A_4|$). It is also interesting to note that the excitation of only one pair will produce a $\pm 45^\circ$ polarization. In this case exciting only P1 and P3 (with 180° phase difference) will produce a broadside pattern with -45° polarization and the pair P2 and P4 (with 180° phase difference) will generate a $+45^\circ$ polarization.

TABLE I
INPUT AMPLITUDES AND PHASE CONFIGURATIONS FOR PATTERN AND POLARIZATION DIVERSITY OF THE PROPOSED ANTENNA

Beam direction	Polariz.	Gain*(dBi)	P1 ($ A_1 $)	P1 ($\Delta\beta_1$)	P2 ($ A_2 $)	P2 ($\Delta\beta_2$)	P3 ($ A_3 $)	P3 ($\Delta\beta_3$)	P4 ($ A_4 $)	P4 ($\Delta\beta_4$)
$\theta = -35^\circ, \phi = 0^\circ$	LP	3.44	1	0°	-	-	-	-	1	0°
$\theta = 35^\circ, \phi = 0^\circ$	LP	3.44	-	-	1	0°	1	0°	-	-
$\theta = -35^\circ, \phi = 90^\circ$	LP	3.47	1	0°	1	0°	-	-	-	-
$\theta = 35^\circ, \phi = 90^\circ$	LP	3.47	-	-	-	-	1	0°	1	0°
Omnidirectional	HP	0.23	1	0°	1	0°	1	0°	1	0°
$\theta = 0^\circ, \phi = 0^\circ$	LP	4.59	1	0°	1	0°	1	180°	1	180°
$\theta = 0^\circ, \phi = -45^\circ$	DP	4.59	1	0°	-	-	1	180°	-	-
$\theta = 0^\circ, \phi = 45^\circ$	DP	4.59	-	-	1	0°	-	-	1	180°
$\theta = 0^\circ, \phi = 0^\circ$	RHCP	4.56	1	0°	1	90°	1	180°	1	270°
$\theta = 0^\circ, \phi = 0^\circ$	LHCP	4.56	1	270°	1	180°	1	90°	1	0°

* Realized gain, $|A_l|$ (amplitude), $\Delta\beta_l$ (phase shift), LP (linear polarization), HP (horizontally polarized), DP ($\pm 45^\circ$ dual-polarization).

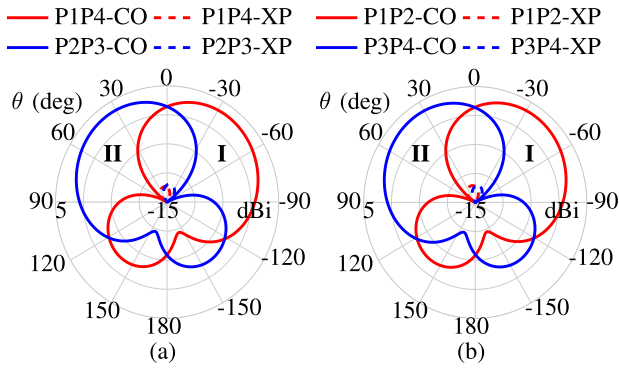


Fig. 5. Pattern diversity of the proposed antenna. Linearly polarized broadside patterns covering (a) xz plane ($\phi = 0^\circ$) and (b) yz plane ($\phi = 90^\circ$).

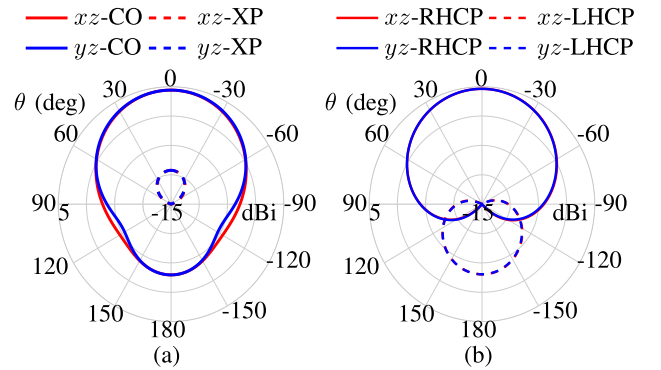


Fig. 7. Polarization diversity of the proposed antenna. (a) Linearly polarized patterns for xz and yz planes. (b) RHCP pattern for the same cuts.

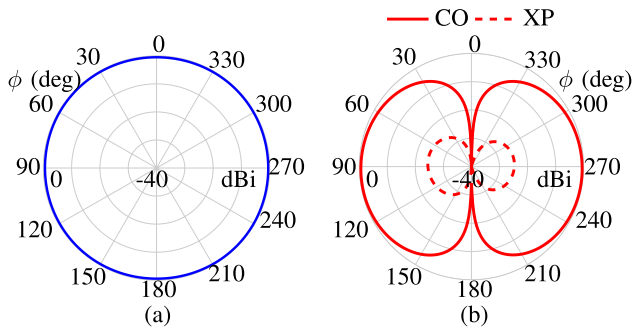


Fig. 6. Proposed antenna horizontally polarized omnidirectional pattern. (a) $\theta = 90^\circ$ plane. (b) $\phi = 0^\circ$ plane.

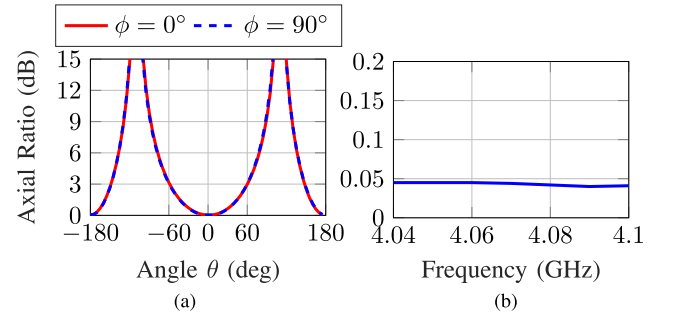


Fig. 8. Axial ratio of the proposed antenna. (a) Axial ratio for xz and yz planes at $f_1 = 4.065$ GHz. (b) Axial ratio over frequency.

The results in Fig. 7(b) also show the polarization diversity of the proposed antenna. To realize circular polarization, a sequential feed with 90° phase difference between each adjacent port is used, i.e., P1 ($|A_1|, \Delta\beta_1 = 0^\circ$), P2 ($|A_2|, \Delta\beta_2 = 90^\circ$), P3 ($|A_3|, \Delta\beta_3 = 180^\circ$), and P4 ($|A_4|, \Delta\beta_4 = 270^\circ$). The configuration produces a broadside right-hand CP (RHCP) pattern [see Fig. 8(a)]. The axial ratio of the obtained patterns is <1 dB within the entire 6 dB IBW [see Fig. 8(b)]. Note that a left-hand CP (LHCP) pattern can be obtained by reversing the above-presented phase configuration. Lastly, Table I outlines each port excitation value to generate

the pattern and polarization diversity characteristics of the proposed design.

IV. EXPERIMENTAL RESULTS

To validate the proposed concept, the antenna was manufactured using LPKF ProtoMat M60 and is shown in Fig. 9. The S-parameters measurements were conducted using a four-port VNA (R&S ZVA40). It can be seen that the center frequency shifted upward from 4.065 GHz [simulated case, Fig. 2(b)] to 4.16 GHz (see Fig. 10). The 10 dB IBW changes from 36.5 MHz in simulations to 11 MHz in measurements; while the 6 dB IBW changes from 82 MHz in simulations, to

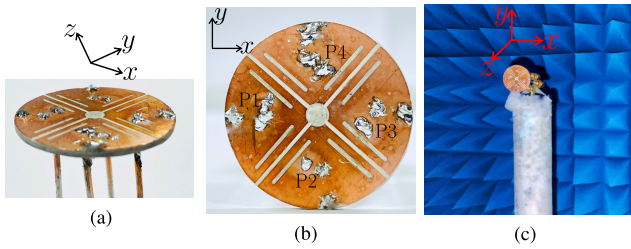


Fig. 9. Manufactured prototype. (a) Perspective view. (b) Top view. (c) Anechoic chamber measurement setup.

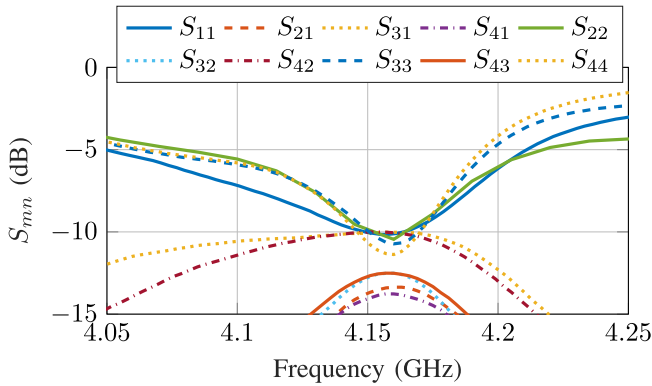


Fig. 10. Measured S-parameters of the manufactured antenna shown in Fig. 9.

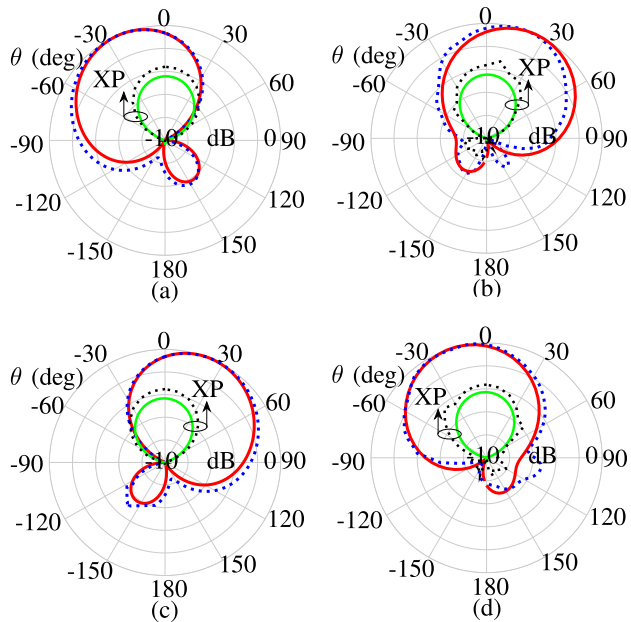


Fig. 11. Measured (dotted lines) and simulated (solid-lines) normalized radiation patterns of the proposed antenna in the xz plane ($\phi = 0^\circ$) for each antenna port. (a) P1. (b) P2. (c) P3. (d) P4.

79 MHz in measurements. These discrepancies are most likely due to manufacturing and permittivity tolerances.

Anechoic chamber measurements were conducted and the measurement setup is shown in Fig. 9(c). The measured patterns (xz plane, $\phi = 0^\circ$) are shown in Fig. 11 at $f_1 = 4.16$ GHz for each respective port. Overall, it is seen that the measured patterns have comparable properties with the respective simulated cases, with their main beams pointing toward: $\theta = -23^\circ$ (in simulations) and $\theta = -25^\circ$

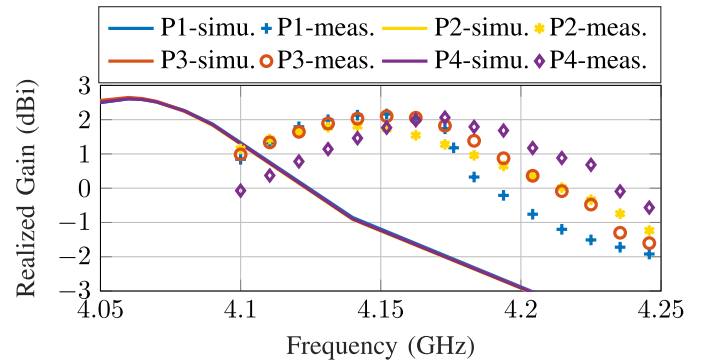


Fig. 12. Realized gain over frequency of each port of the proposed antenna for simulated results (solid lines) and measured results (shown using markers).

(in measurements) for port 1 as shown in Fig. 11(a); $\theta = 21^\circ$ (in simulations) and $\theta = 19^\circ$ in the measured case, for port 2 [see Fig. 11(b)]; for port 3, $\theta = 23^\circ$ for both the simulated and measured cases [see Fig. 11(c)]; and finally for port 4, $\theta = -21^\circ$ for both the simulated and measured cases [see Fig. 11(d)]. The small beamwidth discrepancies seen in the measured patterns, the main beam direction for ports 1 and 2, are most likely due to antenna holder reflections during the measurements [see Fig. 9(c)].

Fig. 12 shows the comparisons between the measured and simulated realized gain for each port. At the center frequency of each case (i.e., 4.065 GHz in simulations and 4.16 GHz in measurements), the peak realized gain is 2.64 dBi in simulations, and it slightly decreases to 2.21 dBi in measurements. Such a discrepancy may be attributed to manufacturing and substrate tolerances and reflections due to the antenna holder during measurements. Fig. 13 shows the pattern diversity of the proposed design in the xz plane, Fig. 13(a) shows the radiation pattern for $\theta = -35^\circ$ direction, and the $\theta = 35^\circ$ radiation pattern is shown in Fig. 13(b). Overall, good agreement is obtained between the simulated and measured cases, and the beamwidth differences may be explained by the beamwidth discrepancies highlighted in Fig. 11.

Fig. 14(a) shows a horizontally polarized omnidirectional pattern. In this case, too, a good agreement is obtained between the simulated and measured cases, with the small shouldering and dips most likely resulting from the beamwidth discrepancies seen in Fig. 11. A linearly polarized broadside pattern is shown in Fig. 14(b). The results also demonstrate good agreement with their counterpart simulated values, validating the efficacy of the proposed design concept.

To highlight the novelty and main advantages of the proposed antenna, a comparison with previously published works is outlined in Table II. The works in [15], [16], [17], [18], [19], [22], [23], [24], [25], [26], [27], and [41] either allow for different beam patterns or polarization diversity. Even though the works in [28], [29], [30], and [31] realize different beam patterns and polarization states, it can be seen that our proposed solution is planar and is capable of pattern and polarization diversity with a structure of only $ka = 1.2$ and 0.018λ profile. To further complement the above comparisons, Fig. 15 shows the Harrington maximum theoretical

TABLE II
COMPARISON WITH PREVIOUSLY PUBLISHED WORKS

Ref.	f_0 (GHz)	Size (ka)	Profile (λ)	Function	FBW(%)	Gain (dBi)	Effi.	Switches	Geometry
[15]	2.45	2.72	0.0067	4-D (Az)	33.6	4.11	60%	Yes	Planar
[16]	2.44	1.32	0.024	4-D (Az), (Ev)	15	3.42	83%	Yes	Planar
[17]	1.1	1.74	0.005	3-D	55	5	-	Yes	Planar
[18]	1.51	0.98	0.0026	1-D, 1-B	1.32	5.4	85%	Yes	Planar
[19]	3.3	3	0.005	1-O, 1-B, 2-T	14.1	7.38	83.4%	No	Planar
[21]	2.45	0.98	0.004	2-D, 1-O	10.5	6	88.6%	Yes	Planar
[23]	0.402	0.13	0.0008	3-D (Az)	2.3	-20	0.4%	Yes	Planar
[24]	2.45	2.28	0.28	5-D (Ev)	9.2	6.7	90%	Yes	Non-Planar
[41]	1.56	0.92	0.05	3-D (Az)	2.73	3.59	85%	Yes	Non-Planar
[22]	1.5	0.944	0.045	LP,CP	0.86	2.97	67%	Yes	Planar
[25]	2.45	2.36	0.008	LP,CP	2.08	4.22	-	Yes	Non-Planar
[26]	2.35	2	0.004	LP,CP	27.6	6.39	-	Yes	Planar
[27]	4.8	2.48	0.037	LP,CP	7.1	6.63	-	Yes	Planar
[29]	3.5	5.2	0.08 λ	4-D (Ev), $\pm 45^\circ$ DP	5.6	7.3	70%	Yes	Non-Planar
[31]	3.75	5.3	0.23 λ	3-D (Ev), DP	24	7	80%	Yes	Non-Planar
[28]	3.45	4.68	0.4 λ	6-D, DP	8.7	> 5	88%	Yes	Non-Planar
[30]	3.27	2	0.14	6-D (Ev), LP, CP	10.7	6	87%	Yes	Non-Planar
Prop.	4.16	1.2	0.018	1-O, > 8-D (Ev),LP,CP, $\pm 45^\circ$ DP	1.9*	4.62	78%	No	Planar

$k = 2\pi/\lambda$, a is the radius of the smallest sphere that completely encloses the respective antenna, *6 dB FBW (fractional bandwidth), Az (Azimuth plane), Ev (elevation plane), B (Bidirectional), D (Directional), T (Tilted) patterns, 4-D (corresponds to four directional patterns), and symbol (-) for not given.

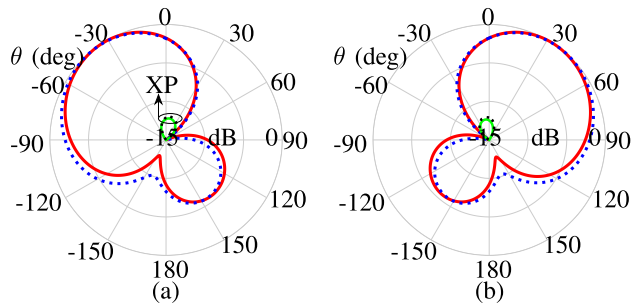


Fig. 13. Measured (dotted lines) and simulated (solid-lines) normalized patterns for $\phi = 0^\circ$ plane. (a) $\theta = -35^\circ$ obtained from P1 and P4. (b) $\theta = 35^\circ$ generated from P2 and P3.

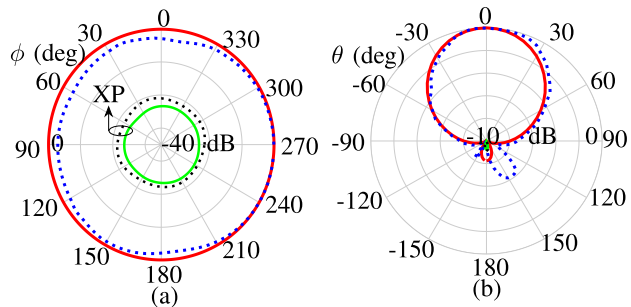


Fig. 14. Measured (dotted lines) and simulated (solid-lines) normalized patterns for (a) linear horizontally polarized omnidirectional pattern ($\theta = 90^\circ$ cut-plane) and (b) linearly polarized broadside pattern for xz plane.

gain (G_{max}) computed with respect to the size of the smallest sphere that fully encloses each proposed antenna [42]. It is observed that the multisector design realizes 4.62 dBi gain; therefore, it quickly approaches its maximum theoretical

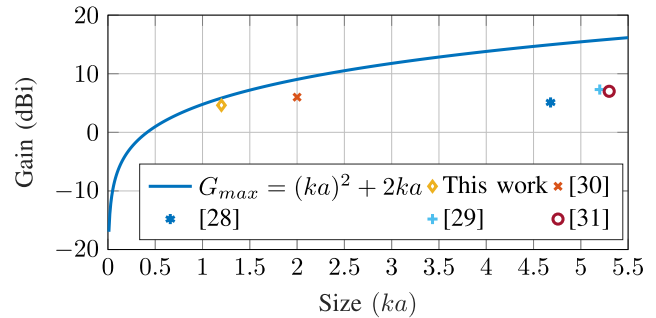


Fig. 15. Peak gain comparisons for the proposed antenna and previously published works against the Harrington maximum gain (computed with respect to the size of the sphere enclosing the antennas).

gain of 5.84 dBi as compared to other previously published pattern and polarization diversity antennas, making it a good candidate to enable advanced radio applications in emerging small IoT devices.

V. CONCLUSION

A very low profile (0.018λ), compact size ($ka = 1.2$), pattern, and polarization diversity annular sector-based antenna, with a gain close to its Harrington maximum gain, was presented. The diversity characteristics are realized by analysis of the modes excited in an annular sector antenna. By using a simple mutual coupling enhancement technique based on slits and vias loading, four concentrically rotated annular sectors are excited using four different ports. The proposed method realizes pattern diversity covering the elevation plane and generates a horizontally polarized omnidirectional pattern, a broadside pattern with linear, circular, and a $\pm 45^\circ$ dual-polarization. A prototype was manufactured and tested, and a good agreement was demonstrated between the measured

and simulated results, validating the design concept. The diversity characteristics were achieved using a planar structure designed on a single printed layer without requiring externally controlled switches. The structure is simple, compact and supports pattern and polarization diversity with simultaneous excitation of multiple beams within a structure requiring only $ka = 1.2$. Therefore, it offers performance and size to allow advanced wireless radio applications in emerging size-constrained IoT devices.

REFERENCES

- [1] P.-Y. Qin, Y. J. Guo, and C.-H. Liang, "Effect of antenna polarization diversity on MIMO system capacity," *IEEE Antennas Wireless Propag. Lett.*, vol. 9, pp. 1092–1095, 2010.
- [2] R. L. Haupt and M. Lanagan, "Reconfigurable antennas," *IEEE Antennas Propag. Mag.*, vol. 55, no. 1, pp. 49–61, Feb. 2013.
- [3] Y. Zhou, R. S. Adve, and S. V. Hum, "Design and evaluation of pattern reconfigurable antennas for MIMO applications," *IEEE Trans. Antennas Propag.*, vol. 62, no. 3, pp. 1084–1092, Mar. 2014.
- [4] J. Costantine, Y. Tawk, S. E. Barbin, and C. G. Christodoulou, "Reconfigurable antennas: Design and applications," *Proc. IEEE*, vol. 103, no. 3, pp. 424–437, Mar. 2015.
- [5] H. Li, B. K. Lau, and S. He, "Design of closely packed pattern reconfigurable antenna array for MIMO terminals," *IEEE Trans. Antennas Propag.*, vol. 65, no. 9, pp. 4891–4896, Sep. 2017.
- [6] J. Hu, X. Yang, L. Ge, and H. Wong, "A polarization and beam steering reconfigurable cavity-backed magneto-electric dipole antenna array using reflection-type phase shifter," *IEEE Trans. Antennas Propag.*, vol. 70, no. 1, pp. 296–306, Jan. 2022.
- [7] Q. Luo et al., *Low-Cost Beam-Reconfigurable Directional Antennas for Advanced Communications*. Hoboken, NJ, USA: Wiley, 2022, ch. 3, pp. 83–117.
- [8] Z. G. Liu and Y. X. Guo, "Dual band low profile antenna for body centric communications," *IEEE Trans. Antennas Propag.*, vol. 61, no. 4, pp. 2282–2285, Apr. 2013.
- [9] A. Zandamela, A. Chiumento, N. Marchetti, and A. Narbudowicz, "Angle of arrival estimation via small IoT devices: Miniaturized arrays vs. MIMO antennas," *IEEE Internet Things Mag.*, vol. 5, no. 2, pp. 146–152, Jun. 2022.
- [10] K. Wu and Y. J. Guo, *Angle-of-Arrival Estimation in Large-Scale Hybrid Antenna Arrays*. Hoboken, NJ, USA: Wiley, 2022, ch. 9, pp. 305–334.
- [11] M. P. Daly, E. L. Daly, and J. T. Bernhard, "Demonstration of directional modulation using a phased array," *IEEE Trans. Antennas Propag.*, vol. 58, no. 5, pp. 1545–1550, May 2010.
- [12] Y. Ding and V. Fusco, "Directional-modulation-enabled physical-layer wireless security," in *Trusted Communications With Physical Layer Security for 5G and Beyond*. Edison, NJ, USA: IET, 2017, ch. 13, pp. 313–336.
- [13] A. Zandamela, N. Marchetti, M. J. Ammann, and A. Narbudowicz, "Spherical modes driven directional modulation with a compact MIMO antenna," *IEEE Antennas Wireless Propag. Lett.*, vol. 22, no. 3, pp. 477–481, Mar. 2023.
- [14] X.-Q. Zhu, Y.-X. Guo, and W. Wu, "Miniaturized dual-band and dual-polarized antenna for MBAN applications," *IEEE Trans. Antennas Propag.*, vol. 64, no. 7, pp. 2805–2814, Jul. 2016.
- [15] G. Jin, M. Li, D. Liu, and G. Zeng, "A simple planar pattern-reconfigurable antenna based on arc dipoles," *IEEE Antennas Wireless Propag. Lett.*, vol. 17, no. 9, pp. 1664–1668, Sep. 2018.
- [16] J. Ouyang, Y. M. Pan, and S. Y. Zheng, "Center-fed unilateral and pattern reconfigurable planar antennas with slotted ground plane," *IEEE Trans. Antennas Propag.*, vol. 66, no. 10, pp. 5139–5149, Oct. 2018.
- [17] A. Darvazehban, S. A. Rezaeieh, and A. Abbosh, "Pattern-reconfigurable loop-dipole antenna for electromagnetic pleural effusion detection," *IEEE Trans. Antennas Propag.*, vol. 68, no. 8, pp. 5955–5964, Aug. 2020.
- [18] Z. Wu, M.-C. Tang, M. Li, and R. W. Ziolkowski, "Ultralow-profile, electrically small, pattern-reconfigurable metamaterial-inspired Huygens dipole antenna," *IEEE Trans. Antennas Propag.*, vol. 68, no. 3, pp. 1238–1248, Mar. 2020.
- [19] Z. Wang, Y. Ning, and Y. Dong, "Compact shared aperture quasi-Yagi antenna with pattern diversity for 5G-NR applications," *IEEE Trans. Antennas Propag.*, vol. 69, no. 7, pp. 4178–4183, Jul. 2021.
- [20] J. A. Liu, Y. F. Cao, and X. Y. Zhang, "A pattern-reconfigurable filtering patch antenna using embedded resonators and switchable elements," *IEEE Trans. Antennas Propag.*, vol. 70, no. 5, pp. 3828–3833, May 2022.
- [21] S. Zhao, Z. Wang, and Y. Dong, "A planar pattern-reconfigurable antenna with stable radiation performance," *IEEE Antennas Wireless Propag. Lett.*, vol. 21, no. 4, pp. 784–788, Apr. 2022.
- [22] M.-C. Tang, Z. Wu, T. Shi, and R. W. Ziolkowski, "Electrically small, low-profile, planar, Huygens dipole antenna with quad-polarization diversity," *IEEE Trans. Antennas Propag.*, vol. 66, no. 12, pp. 6772–6780, Dec. 2018.
- [23] V. T. Nguyen and C. W. Jung, "Radiation-pattern reconfigurable antenna for medical implants in MedRadio band," *IEEE Antennas Wireless Propag. Lett.*, vol. 15, pp. 106–109, 2015.
- [24] S.-L. Chen, P.-Y. Qin, W. Lin, and Y. J. Guo, "Pattern-reconfigurable antenna with five switchable beams in elevation plane," *IEEE Antennas Wireless Propag. Lett.*, vol. 17, no. 3, pp. 454–457, Mar. 2018.
- [25] L. Zhang et al., "A quad-polarization reconfigurable antenna with suppressed cross polarization based on characteristic mode theory," *IEEE Trans. Antennas Propag.*, vol. 69, no. 2, pp. 636–647, Feb. 2021.
- [26] M. Li, Z. Zhang, M.-C. Tang, L. Zhu, and N.-W. Liu, "Bandwidth enhancement and size reduction of a low-profile polarization-reconfigurable antenna by utilizing multiple resonances," *IEEE Trans. Antennas Propag.*, vol. 70, no. 2, pp. 1517–1522, Feb. 2022.
- [27] M. Li, Z. Zhang, and M.-C. Tang, "A compact, low-profile, wide-band, electrically controlled, tri-polarization-reconfigurable antenna with quadruple gap-coupled patches," *IEEE Trans. Antennas Propag.*, vol. 68, no. 8, pp. 6395–6400, Aug. 2020.
- [28] Y. Jia, G. Jiang, Y. Liu, and Y. Zhong, "Beam scanning for dual-polarized antenna with active reflection metasurface," *IEEE Antennas Wireless Propag. Lett.*, vol. 21, no. 9, pp. 1722–1726, Sep. 2022.
- [29] W.-Q. Deng, X.-S. Yang, C.-S. Shen, J. Zhao, and B.-Z. Wang, "A dual-polarized pattern reconfigurable Yagi patch antenna for microbase stations," *IEEE Trans. Antennas Propag.*, vol. 65, no. 10, pp. 5095–5102, Oct. 2017.
- [30] G.-W. Yang, J. Li, B. Cao, D. Wei, S.-G. Zhou, and J. Deng, "A compact reconfigurable microstrip antenna with multidirectional beam and multipolarization," *IEEE Trans. Antennas Propag.*, vol. 67, no. 2, pp. 1358–1363, Feb. 2019.
- [31] G. A. Ramirez et al., "Reconfigurable dual-polarized beam-steering broadband antenna using a crossed-strips geometry," *IEEE Antennas Wireless Propag. Lett.*, vol. 20, no. 8, pp. 1379–1383, Aug. 2021.
- [32] A. A. Deshmukh and N. V. Phatak, "Broadband sectoral microstrip antennas," *IEEE Antennas Wireless Propag. Lett.*, vol. 14, pp. 727–730, 2015.
- [33] Z. Liang, J. Liu, Y. Zhang, and Y. Long, "A novel microstrip quasi Yagi array antenna with annular sector directors," *IEEE Trans. Antennas Propag.*, vol. 63, no. 10, pp. 4524–4529, Oct. 2015.
- [34] X. Liu, Y. Li, Z. Liang, S. Zheng, J. Liu, and Y. Long, "A method of designing a dual-band sector ring microstrip antenna and its application," *IEEE Trans. Antennas Propag.*, vol. 64, no. 11, pp. 4896–4901, Nov. 2016.
- [35] W.-J. Lu, Q. Li, S.-G. Wang, and L. Zhu, "Design approach to a novel dual-mode wideband circular sector patch antenna," *IEEE Trans. Antennas Propag.*, vol. 65, no. 10, pp. 4980–4990, Oct. 2017.
- [36] Z.-F. Wu, W.-J. Lu, J. Yu, and L. Zhu, "Wideband null frequency scanning circular sector patch antenna under triple resonance," *IEEE Trans. Antennas Propag.*, vol. 68, no. 11, pp. 7266–7274, Nov. 2020.
- [37] J. Yu, W.-J. Lu, Y. Cheng, and L. Zhu, "Tilted circularly polarized beam microstrip antenna with miniaturized circular sector patch under wide-band dual-mode resonance," *IEEE Trans. Antennas Propag.*, vol. 68, no. 9, pp. 6580–6590, Sep. 2020.
- [38] S. K. Ghosh, A. Ghosh, S. Chakraborty, L. L. K. Singh, and S. Chattopadhyay, "Design approach toward compact circular sector microstrip antenna with low cross polarization," *IEEE Antennas Wireless Propag. Lett.*, vol. 20, no. 3, pp. 376–380, Mar. 2021.
- [39] W. Richards, J.-D. Ou, and S. Long, "A theoretical and experimental investigation of annular, annular sector, and circular sector microstrip antennas," *IEEE Trans. Antennas Propag.*, vol. AP-32, no. 8, pp. 864–867, Aug. 1984.
- [40] Y. Lo, D. Solomon, and W. Richards, "Theory and experiment on microstrip antennas," *IEEE Trans. Antennas Propag.*, vol. AP-27, no. 2, pp. 137–145, Mar. 1979.

- [41] M.-C. Tang, B. Zhou, and R. W. Ziolkowski, "Low-profile, electrically small, Huygens source antenna with pattern-reconfigurability that covers the entire azimuthal plane," *IEEE Trans. Antennas Propag.*, vol. 65, no. 3, pp. 1063–1072, Mar. 2017.
- [42] R. Harrington, "On the gain and beamwidth of directional antennas," *IRE Trans. Antennas Propag.*, vol. AP-6, no. 3, pp. 219–225, Jul. 1958.



Abel Zandamela (Graduate Student Member, IEEE) received the B.Eng. degree in information engineering from the South China University of Technology, Guangzhou, China, in 2017, and the M.Eng. degree in electrical and software systems engineering from the King Mongkut's University of Technology North Bangkok, Bangkok, Thailand, in 2019. He is currently pursuing the Ph.D. degree with the Trinity College Dublin, The University of Dublin, Dublin, Ireland.

From 2018 to 2020, he was with the Institute of High Frequency Technology (IHF), RWTH Aachen University, Aachen, Germany. His research interests include electrically small antennas, beam-steering antennas, wireless physical layer security, on-body antennas, MIMO antennas, the IoT localization systems, and leaky-wave antennas.

Mr. Zandamela has received the IEEE 2022 AP-S Doctoral Research Grant, the Prof. Tom Brazil CONNECT Research Center Excellence in Research 2022 Student Award, the TICRA–EurAAP Grant for 2022 EuCAP, and the IEEE 2021 AP-S C. J. Reddy Travel Grant.



Nicola Marchetti (Senior Member, IEEE) received the M.Sc. degree in electronic engineering from the University of Ferrara, Ferrara, Italy, in 2003, and the Ph.D. degree in wireless communications and the M.Sc. degree in mathematics from Aalborg University, Aalborg, Denmark, in 2007 and 2010, respectively.

He is currently an Associate Professor of wireless communications and a fellow with the Trinity College Dublin, The University of Dublin, Dublin, Ireland, where he leads the Wireless Engineering and Complexity Science Laboratory (WhyCOM). He has authored more than 180 journal articles and conference papers, two books, and nine book chapters. He holds four patents. He has received four best paper awards. His research interests include AI for future networks, bio-inspired and bio-enabled networks, complex and self-organizing networks, MAC protocols and radio resource management, signal processing for communications, and quantum communications and networks.

Dr. Marchetti is an IEEE Communications Society Distinguished Lecturer. He has served as an Associate Editor for the IEEE INTERNET OF THINGS JOURNAL and the *EURASIP Journal on Wireless Communications and Networking*.



Max J. Ammann (Fellow, IEEE) received the Ph.D. degree in antennas and propagation from the Trinity College Dublin, The University of Dublin, Dublin, Ireland, in 1997.

He is currently a Professor of antennas and propagation with the School of Electrical and Electronic Engineering, Technological University Dublin, Dublin, and the Director of the Antennas and High-Frequency Research Centre. He became a Chartered Engineer in 1986. He has more than 200 peer-reviewed papers published in journals and international conferences. His research interests include electromagnetic theory, antenna miniaturization for terminal and ultrawideband applications, antennas for medical devices, and antenna issues relating to privacy.

Dr. Ammann is a member of the IEEE International Committee for Electromagnetic Safety. His team has received 13 Best Paper Awards at International Conferences on Antennas and Propagation and seven Commercialization Awards. He has served as an expert in the industry on various antenna technologies in communications, medical, aviation, and electronic security sectors in Ireland and Abroad. He has co-chaired IWAT2022 in Dublin and various workshops on antennas and related technologies. He was an Associate Editor of the IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS from 2012 to 2018.



Adam Narbudowicz (Senior Member, IEEE) received the M.Sc. degree from the Gdańsk University of Technology, Gdańsk, Poland, in 2008, the Ph.D. degree from the Dublin Institute of Technology (now TU Dublin), Dublin, Ireland, in 2013, and the Habilitation degree from the Wrocław University of Science and Technology, Wrocław, Poland, in 2020.

He is currently a Senior Researcher with the Trinity College Dublin, The University of Dublin, Dublin, and a part-time Associate Professor with the Wrocław University of Science and Technology. He was a Post-Doctoral Fellow (twice) of Marie Skłodowska-Curie Action co-funded projects, including a two-year research stay at RWTH Aachen University, Aachen, Germany. His research interests include antenna miniaturization and reconfigurable antenna, sustainable antenna technology, and the use of machine learning for radar applications.

Dr. Narbudowicz has coauthored more than 80 scientific publications in journals and peer-reviewed conference proceedings. He was selected as the 2023 IEEE APS Young Professional Ambassador. He has received the DIT Inventor Competition Award for Best Postgraduate/Staff Invention in 2012, the Third Best Paper Award at ISAP 2017, the Inaugural 2018 Prof. Tom Brazil CONNECT Excellence in Research Award, the Best Poster by Popular Vote at the 2018 IEEE-EURASIP Summer School on Signal Processing, and the Scholarship for Outstanding Young Polish Scientists in 2019. He was also a mentor to the Finalist Team of the 2020 IEEE AP-S Student Design Contest. He sits on the Management Committee of the COST Action SyMat. He serves as the Vice-Chair for EurAAP Small Antenna Working Group and IEEE Poland APS/MTT/AES Joint Chapter.