

2016-6

Planer Ultra Wide Band Antennas and Band Rejection Characteristics

Waqas Jamshed

National University of Sciences and Technology (NUST), Islamabad, Pakistan, waqee.satti@gmail.com

Faiz Khalid

National University of Sciences and Technology (NUST), Islamabad, Pakistan

Zeeshan Ahmed

Technological University Dublin

See next page for additional authors

Follow this and additional works at: <https://arrow.tudublin.ie/engscheleart2>



Part of the [Engineering Commons](#)

Recommended Citation

Waqas, J. et al. (2016) Planer Ultra Wide Band Antennas and Band Rejection Characteristics, *Sci.Int.(Lahore)*,28(3),2473-2476,2016

This Article is brought to you for free and open access by the School of Electrical and Electronic Engineering at ARROW@TU Dublin. It has been accepted for inclusion in Articles by an authorized administrator of ARROW@TU Dublin. For more information, please contact arrow.admin@tudublin.ie, aisling.coyne@tudublin.ie.



This work is licensed under a [Creative Commons Attribution-NonCommercial-Share Alike 4.0 License](#)

Authors

Waqas Jamshed, Faiz Khalid, Zeeshan Ahmed, and Farooq Bhatti

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/304041412>

Compact Planar Mobile Phone MIMO Antenna with Enhanced Gain

Article · June 2016

CITATIONS

0

READS

123

4 authors, including:



Faiz Khalid Lodhi

National University of Sciences and Technology

7 PUBLICATIONS 4 CITATIONS

SEE PROFILE



Zeeshan Ahmed

Dublin Institute of Technology

9 PUBLICATIONS 7 CITATIONS

SEE PROFILE



Farooq Ahmad Bhatti

National University of Sciences & Technology

8 PUBLICATIONS 25 CITATIONS

SEE PROFILE

Some of the authors of this publication are also working on these related projects:



A Self-learning Framework to Detect the Intruded Integrated Circuits [View project](#)

All content following this page was uploaded by [Zeeshan Ahmed](#) on 17 June 2016.

The user has requested enhancement of the downloaded file. All in-text references [underlined in blue](#) are added to the original document and are linked to publications on ResearchGate, letting you access and read them immediately.

COMPACT PLANNER MOBILE PHONE MIMO ANTENNA WITH ENHANCED GAIN

Waqas Jamshed¹, Faiz Khalid¹, Zeeshan Ahmed¹, Farooq Ahmed Bhatti¹

¹Faculty of Electrical Engineering, Military College of Signals (MCS),
National University of Sciences and Technology (NUST), Islamabad, Pakistan

Email : waqee.satti@gmail.com , { 09310827, fabhatti } @mcs.edu.pk , zeeshan.ahmed5490@gmail.com

ABSTRACT— The presented paper exhibits a compact two element multiple input multiple output (MIMO) antenna which is covering wide bandwidth and enhanced gain is presented. The proposed MIMO antenna consists of two monopoles; each is fed by L shaped microstrip line. Monopole is used to feed an inverted L shaped structure which extends from ground. Isolation between two monopoles is achieved by placing a slot on ground plane. The proposed antenna has dimensions of 100mm x 97mm. In addition, an impedance bandwidth ($S_{11} < -6\text{dB}$) from 0.8GHz to 3.5GHz which covers the 2G frequency bands (GSM900/GSM1800/GSM1900), 3G frequency band (CDMA2000) and of the 4G frequency band having isolation greater than -13.5dB is achieved. The performance of diversity is also calculated in terms of envelope correlation coefficient and diversity gain. Simulated and measured results of the proposed antenna are in good agreement.

I. INTRODUCTION

Modern wireless technology has an increasing demand of increase data rate and high performance. Traditional wireless technologies can barely satisfy these demands. Recently, MIMO (Multiple Input Multiple Output) technology has gained importance due to reduced multi path fading, high data capacity and high reliability [1]. Multi path fading is a big challenge in many practical applications because transmitted signals can travel from different paths to the receiver having different phase angles and amplitudes, and most probably they add up destructively at receiver. MIMO technology in antennas is the best solution to this challenge. [2]-[9] present various MIMO antennas designed specifically for certain type of communication applications.

Eye catching advantages of MIMO technology have made it an important technology for 4G (LTE) and as well as for 5G which is a future wireless communication technology. While 2G/3G technology is still in use, 4G communication is quickly popularizing all over the world. MIMO antennas are a perfect choice for mobile phone purposes as they offer wide bandwidth and coverage of 2G/3G/4G bands. [2]-[9] presents with a few MIMO designs for 4G applications. Out of stated 4G MIMO antennas, designs presented in [4]-[5] are not suitable for use in mobile phones due to their large size as compared to the standard sizes of current generation mobile phones. Ceramic based mobile phone antenna is presented in [6] and a multi-band MIMO antenna with PIFA structure is proposed in [7]. Both of them have significant heights and non-planar structure which makes them unsuitable for mobile phones as they are getting thinner with advancement in technology. MIMO antennas of [8] and [9] have simpler structure and suitable size but they do not have adequate bandwidth to cover all 2G, 3G and 4G bands. Bandwidth enhancement techniques are presented in [14-17]. The following discussion presents a planer wideband two-port MIMO antenna for smart phone application. The exhibited MIMO antenna has single element working at center frequency and an inverted L shape structure is made from ground plane to create low resonance frequencies. A two port antenna is formed by placing elements in symmetry. A slot is etched from ground plane in order to increase isolation between the individual elements. The bandwidth of the MIMO antenna under discussion ranges from 0.8GHz to 3.5GHz, which covers operating bands of 2G, 3G, 4G and Wi-Fi (2.45GHz).

The measured and simulated isolation, peak realized gain and envelope correlation coefficient are also presented in this paper.

II. GEOMETRY & DESIGN

The geometry of MIMO antenna constitutes an element located on the ground plane having dimensions of 60x58mm², which is small in size as compared to the mobile phones. The substrate material used for planner MIMO antenna is FR4 with relative permittivity of 4.4, thickness 1 mm and dielectric loss tangent of 0.02. The Objective of our design is to cover a wide band which should cover 2G/3G/4G bands and Wi-Fi (2.45 GHz).

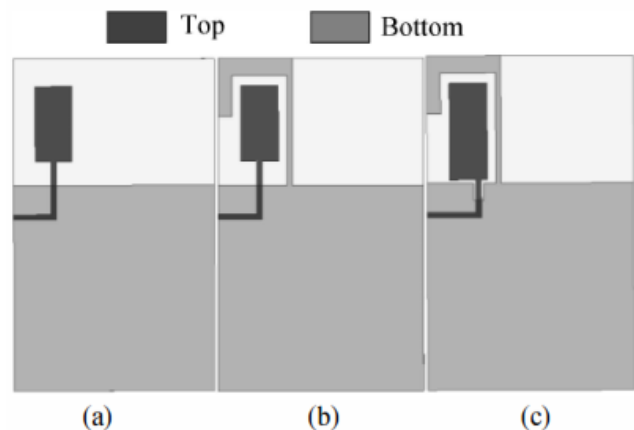


Fig. 1. Three design steps (a) Single antenna element (b) Single element with inverted L structure (c) Optimized antenna element design

A. Wide Band Technique

Fig. 1 shows the steps for designing the planner wide band MIMO antenna. First of all, a monopole was designed with proper dimensions, which was designed to operate at center frequency of 1.8GHz. A feeding strip of 50 ohms feeds the monopole. Then the design was simulated on HFSS and the simulated S parameters of monopole show that the monopole covers the wide range of bandwidth from 1.1 GHz to 2.7 GHz at -6 dB reference line. Then an inverted L shape structure known as SIR stub technique is used to enhance the bandwidth. The inverted L shape structure which is extended from the ground plane is placed around the monopole which generates the low resonant frequencies and also broadens the bandwidth. Bandwidth is broadened to 0.8 GHz to 3.5 GHz. For the purpose of more impedance matching, a small patch is etched from the ground plane opposite to the feeding and

all the parameters are optimized accordingly as shown in Fig1 (b).

Fig. 2 presents the S parameters of the optimized design of antenna element, simulated using HFSS. It can be seen that the final design is achieving 0.8GHz to 3.5GHz bandwidth with a very good impedance matching.

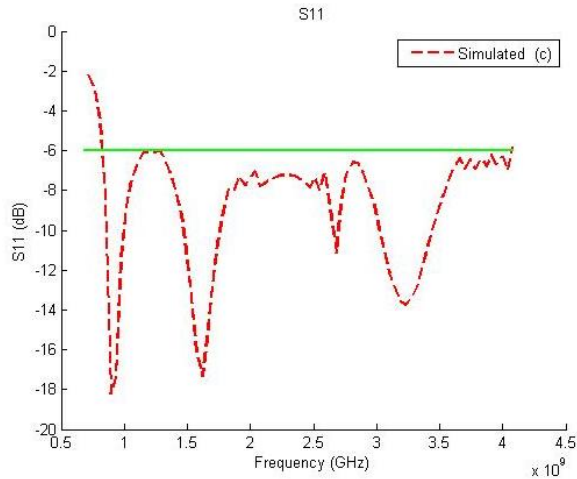


Fig. 2. Simulated S parameter of antenna final antenna element of 1(c)

B. TWO ELEMENTS MIMO ANTENNA

Basing on the above mentioned final design, second antenna element is introduced in the antenna design on the substrate which is totally symmetrical to form a compact wide band planar MIMO antenna as presented in Fig. 3. The compressed size of the compact wide band planar MIMO antenna is 97 mm x 60 mm x 1 mm, while the size used in [9] is 125 mm 85 mm x 0.8-mm using FR4. The software used for the simulation is High Frequency Simulation (HFSS) Version-13. The optimized parameters and dimensions of the compact wide band planar MIMO antenna are listed in Table.1.

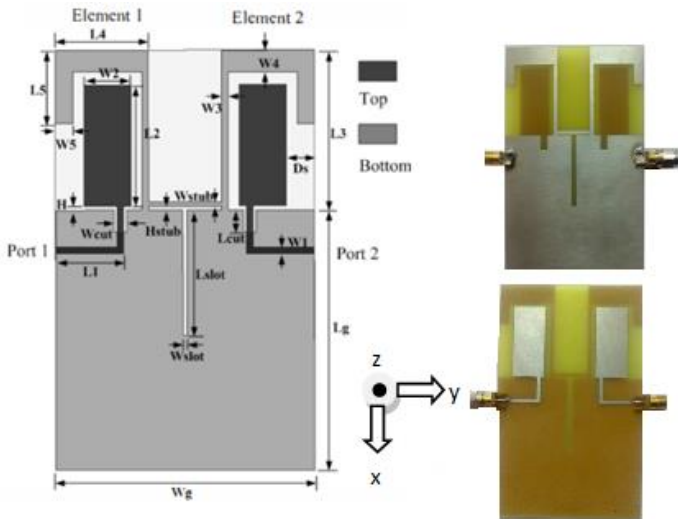


Fig. 3. Geometry of final design and prototype

Simulated and measured S parameters of the compact wide band planar MIMO antenna designs are exhibited in Figure 4. As a result of identical geometry and positioning of the two elements, antenna achieves wider bandwidth as

mentioned above. The proposed design of MIMO achieves bandwidth from 0.8 GHz to 3.5 GHz which covers all the bands of frequencies currently being used by major mobile phone operators across the globe.

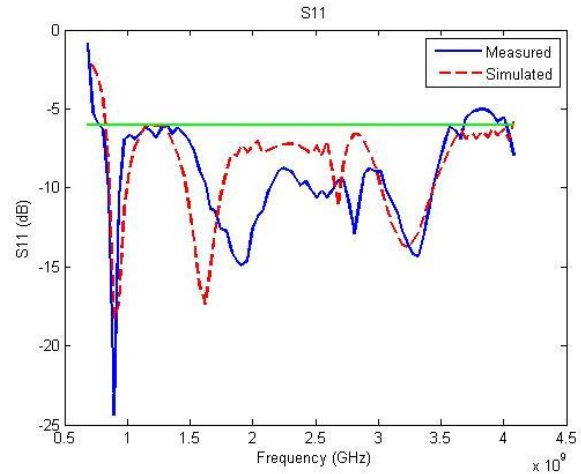


Fig. 4: Simulated and Measured S11

Table 1: Optimized Dimensions of the Antenna

Parameter	I1	I2	I3	I4	I5
Value(mm)	15	31.5	41	23	17
Parameter	w1	w2	w3	w4	w5
Value(mm)	1	13	1.5	9	4.1
Parameter	Lcut	H	Hstub	Lslot	Lg
Value(mm)	5	0.1	0.5	30	56
Parameter	Wcut	Ds	Wstub	Wslot	Wg
Value(mm)	3	6.5	1.5	2	60

C. ISOLATION ACHIEVEMENT

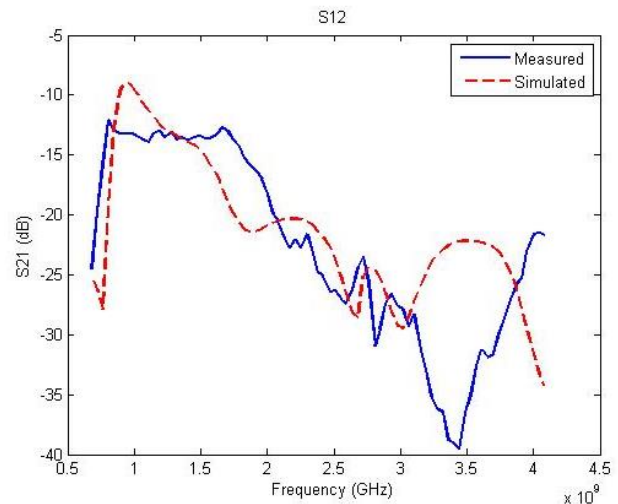


Fig. 5. Simulated and Measured S21

In compact wide band planar MIMO antenna design, higher isolation between antenna elements with less disturbing impedance match is one of the serious challenges. Various decoupling techniques are used in different applications [2]-[9]. In proposed design, measured isolation is achieved by etching a slot in ground plane. It is observed that etching helps reduce isolation on lower band and on higher band it

increases isolation. Isolation can be increased by achieving a neutralization point between antenna elements as it depends mainly on the surface current flowing between them. This neutralization point depends on wavelength. In lower frequencies because of much large wavelength, the surface current and near field radiation pattern add significantly to coupling. Fig. 5 shows the simulated and measured result that S_{21} is less than -12.5dB from 0.8 GHz to 2.1 GHz and -20 dB above 2.1 GHz up to 3.5 GHz.

III. RESULTS AND DISCUSSION

Fig. 6 shows 3D plot at 0.9 GHz, 1.8 GHz, 2.1 GHz, 2.4 GHz, 2.7 GHz and 3.4 GHz. It shows that lower 0.9GHz radiation pattern is omnidirectional while at higher frequencies it is quasi-omnidirectional. Figure 7 shows Peak realized gain; the proposed MIMO antenna has a steady gain greater than 2.8dBi over the entire frequency band i-e from .8 GHz to 3.5 GHz of the proposed design and very high gain of 6.7 dBi at 0.9 GHz. Fig-8 shows the radiation efficiency. The compact wide band planar MIMO antenna has more than 80% efficiency over most of the operating frequency band.

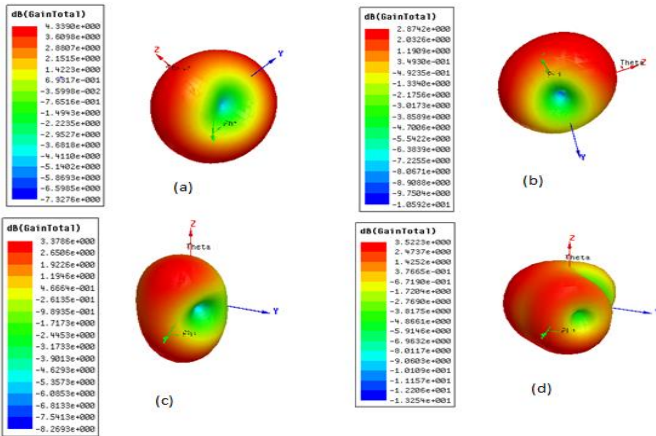


Fig. 6. 3D radiation pattern

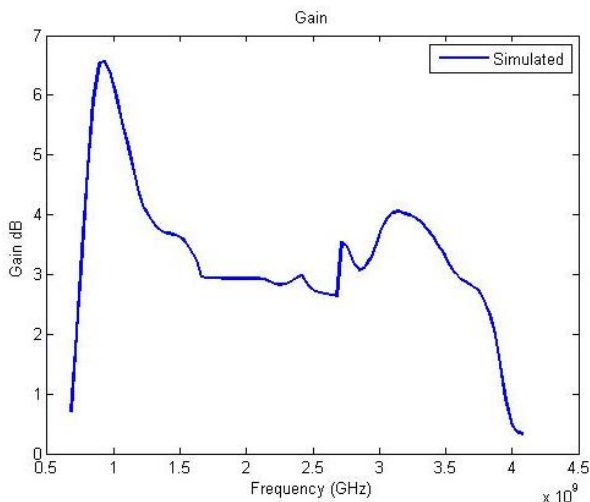


Fig. 7. Simulated Realized Peak gain

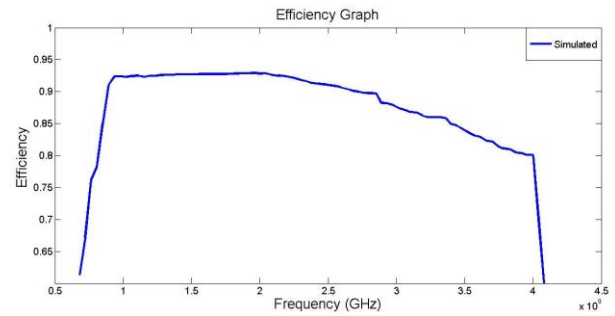


Fig. 8. Simulated Efficiency

A. Diversity Performance

Efficient MIMO system is characterized by spatial diversity and channel independence. The spatial diversity and channel independence is achieved by the reduction of the mutual coupling between antenna elements. Envelope Correlation Coefficient (ECC) is a very important parameter that helps to analyze the diversity performance. ECC is calculated using either the radiation patterns as in [10] or by using the S-parameters as per the method presented in [11].

$$ECC = \left| \frac{|S_{12}S_{11}^* - S_{21}S_{22}^*|}{|(1-|S_{22}|^2 - |S_{12}|^2)(1-|S_{11}|^2 - |S_{21}|^2)|^{1/2}} \right|^2 \tag{1}$$

In this paper we used s-parameters to calculate ECC by using equation (1). For practical application ECC value less than 0.5 is acceptable for mobile phones. Fig. 9 shows measured ECC is less than 0.36 over complete operating frequency band, which is all right for mobile phones.

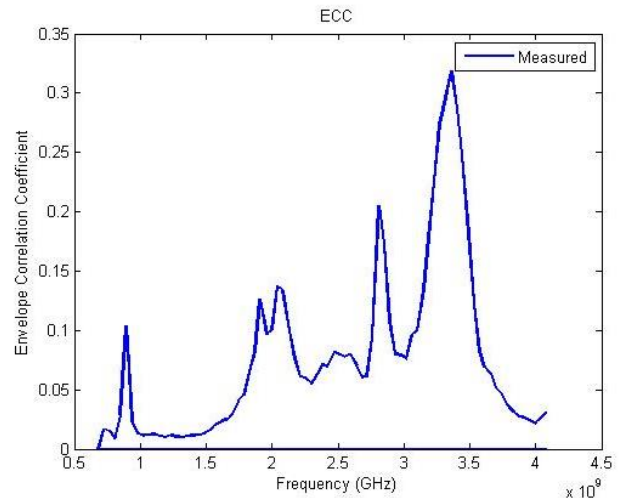


Fig. 9. Measured ECC

IV. CONCLUSION

In particular this paper compact planner two port MIMO antenna with wideband width and high gain is presented. The proposed antenna is simulated and fabricated, which achieves a wide bandwidth from 0.8GHz to 3.5GHz covering 2G/3G/4G bands and Wi-Fi (2.45GHz). High isolation between antenna elements, lower ECC and high diversity gain makes the design of the compact planner wide band MIMO antenna a suitable candidate for mobile phone applications.

REFERENCES

- [1] M. A. Jensen, I. W. Wallace, "A review of antennas and propagation for MIMO wireless communications," *IEEE Trans. Antennas Propag.*, vol. 52, no. II, pp. 2810-2824, Nov. 2004.
- [2] X. Mao and Q. X. Chu, "Compact Coradiator UWB-MIMO Antenna With Dual Polarization," *IEEE Trans. Antennas Propag.*, vol. 62, no. 9, pp. 4474-4479, Sep. 20 14.
- [3] W. C. Zheng, L. Zhang, Q. X. Li, and Y. Leng, "Dual-Band Dual-Polarized Compact Bowtie Antenna Array for Anti-Interference MIMO WLAN," *IEEE Trans. Antennas Propag.*, vol. 62, no. I, pp.237-246, Jan. 20 14.
- [4] S. C. Fernandez and S. K. Sharma, "Multiband Printed Meandered Loop Antennas With MIMO Implementations for Wireless Routers," *IEEE Antennas Wireless Propag. Lett.*, vol. 12, pp. 96-99, 20 13.
- [5] S. F. Roslan, M. R. Kamarudin, M. Khalily, and M. H. Jamaluddin, "An MIMO Rectangular Dielectric Resonator Antenna for 4G Applications," *IEEE Antennas Wireless Propag. Lett.*, vol. 13, pp. 32 1-324, 2014.
- [6] Y. J. Ren, "Ceramic Based Small LTE MIMO Handset Antenna," *IEEE Trans. Antennas Propag.*, vol. 61, no. 2, pp. 934-938, Feb. 20 13.
- [7] H. S. Singh, M. Agarwal, and G. K. Pandey, "A Quad-Band Compact Diversity Antenna for GPS L1/Wi-Fi/LTE2500/WiMAX/HIPERLANI Applications," *IEEE Antennas Wireless Propag. Lett.*, vol. 13, pp. 249-252, 2014.
- [8] M. S. Sharawi, A. B. Numan, M. U. Khan, and D. N. Aloi, "A Dual-Element Dual-Band MIMO Antenna System with Enhanced Isolation for Mobile Terminals," *IEEE Antennas Wireless Propag. Lett.*, vol. II, pp. 1006-1009, 2012.
- [9] S. Shoaib, I. Shoaib, N. Shoaib, X. D. Chen, and C. G. Parini, "Design and Performance Study of a Dual-Element Multiband Printed Monopole Antenna Array for MIMO Terminals," *IEEE Antennas Wireless Propag. Lett.*, vol. 13, pp. 329-332, 20 14.
- [10] R. G. Vaughan and J. B. Andersen, "Antenna Diversity in Mobile Communications," *IEEE Trans. Veh. Technol.*, vol. VT-36, no. 4, pp. 149-172, Nov. 1987.
- [11] P. Hallbjorn, "The Significance of Radiation Efficiencies When Using S-Parameters to Calculate the Received Signal Correlation From Two Antennas," *IEEE Antennas Wireless Propag. Lett.*, vol. 4, pp. 97-99, 2005.
- [12] A.A.H. Azremi, I. Toivanen, T. Laitinen, P. Vainikainen, X. Chen, N. Jamaly, J. Carlsson, P.-S. Kildal and S. Pivnenko, "On Diversity Performance of Two-Element Coupling Element Based Antenna Structure for Mobile Terminal," in *Proc. 4th. Eur. Conf. Antennas Propag.*, 20 10, pp. 1-5.
- [13] Y. Gao, X. D. Chen, Z. N. Ying and C. Parini, "Design and Performance Investigation of a Dual-Element PIFA Array at 2.5 GHz for MIMO Terminal," *IEEE Trans. Antennas Propag.*, vol. 55, no. 12, pp. 3433-3441, Dec. 2007.
- [14] Ahmed, Z.; Perwasha, G.; Shahid, S.; Zahra, H.; Saleem, I.; Abbas, S.M.: Ultra wideband antenna with WLAN band-notch characteristic. 2013 3rd International Conference on Computer, Control & Communication (IC4), 1-5 (Sept. 2013).
- [15] Z Ahmed, FK Lodhi, ZU Islam, F Shamshad, I Rashid, FA Bhatti, "Ultra-Wideband Microstrip Antennas with WLAN Band-Notch Capability" *International Journal of Computer and Communication System Engineering (IJCCSE)*, Vol. 2 (4), 2015, 575-580
- [16] Z Ahmed, FK Lodhi, M Idrees, ZU Islam, FB Zarrabi, U Majeed, FA Bhatti, "A uniquely-fed miniaturized ultra-wideband antenna with dual band-rejection characteristics." *Sci.Int.(Lahore)*, 27(6), 5015-5019, 2015.
- [17] Z Ahmed, FK Lodhi, FA Bhatti, "Planar Ultra Wide Band Antennas and Band Rejection Characteristics" LAP LAMBERT Academic Publishing, 2016.